



SCREW DISPENSER

ADVANTAGES

> Reliable processing

Minimises risk of error by supplying the correct number and type of screws.

> Flexible

Can be combined with different DEPRAG feeding devices for the supply of up to three different screw types.

> Technical cleanliness

In combination with the DEPRAG particle killer.

> Ergonomic

Supplies the correct screw to point of use.



Technical data

Screw Dispenser	Type Part no.	SD-K12-L30-3 133000A	SD-K12-L60-3 133100A
Max. number of different screw types	pcs.	3	
Max. shaft length	mm	30	60
Max. head diameter	mm	12	
Operating voltage	Volt	24	
Operating pressure	bar	6	
Dimensions (WxHxL)	mm	100x214.1x234	100x212.1x319
Weight	kg	4.5	6.75



> Customer-specific system designs are also available.
Please contact us to discuss the right solution for you!

Dimension sheet


Type SD-K12-L30-3

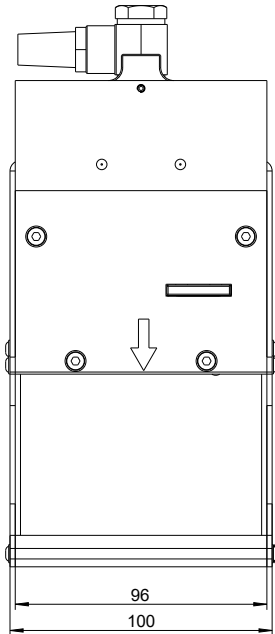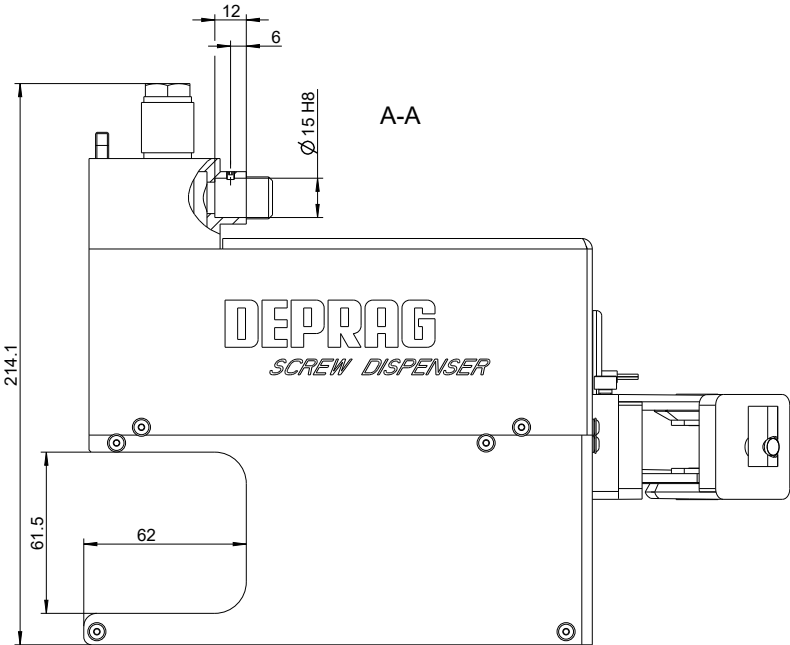

Type SD-K12-L60-3

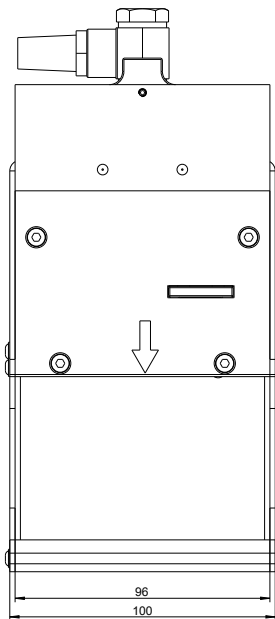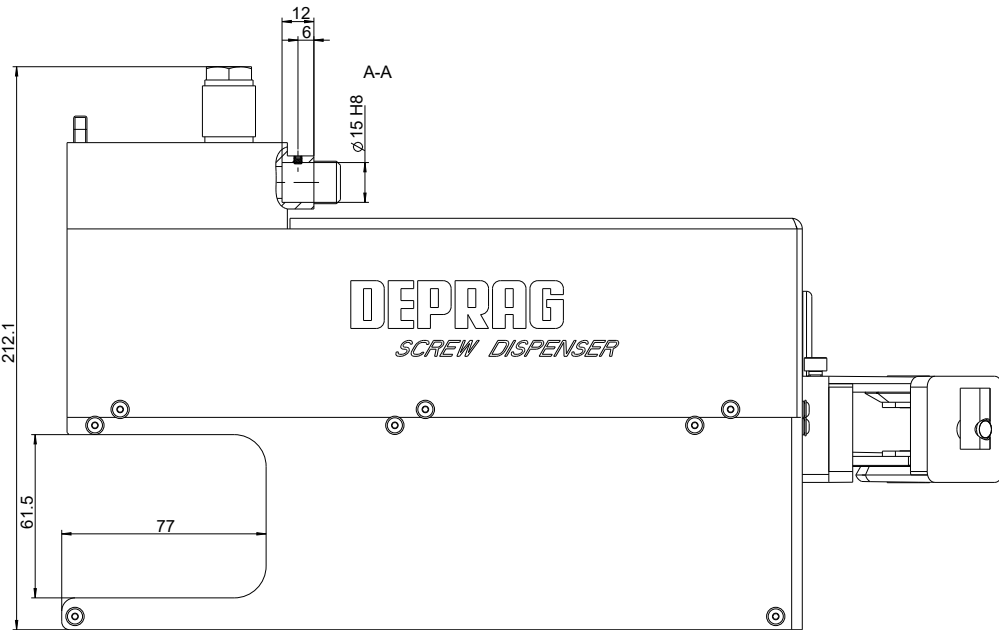

Complete system

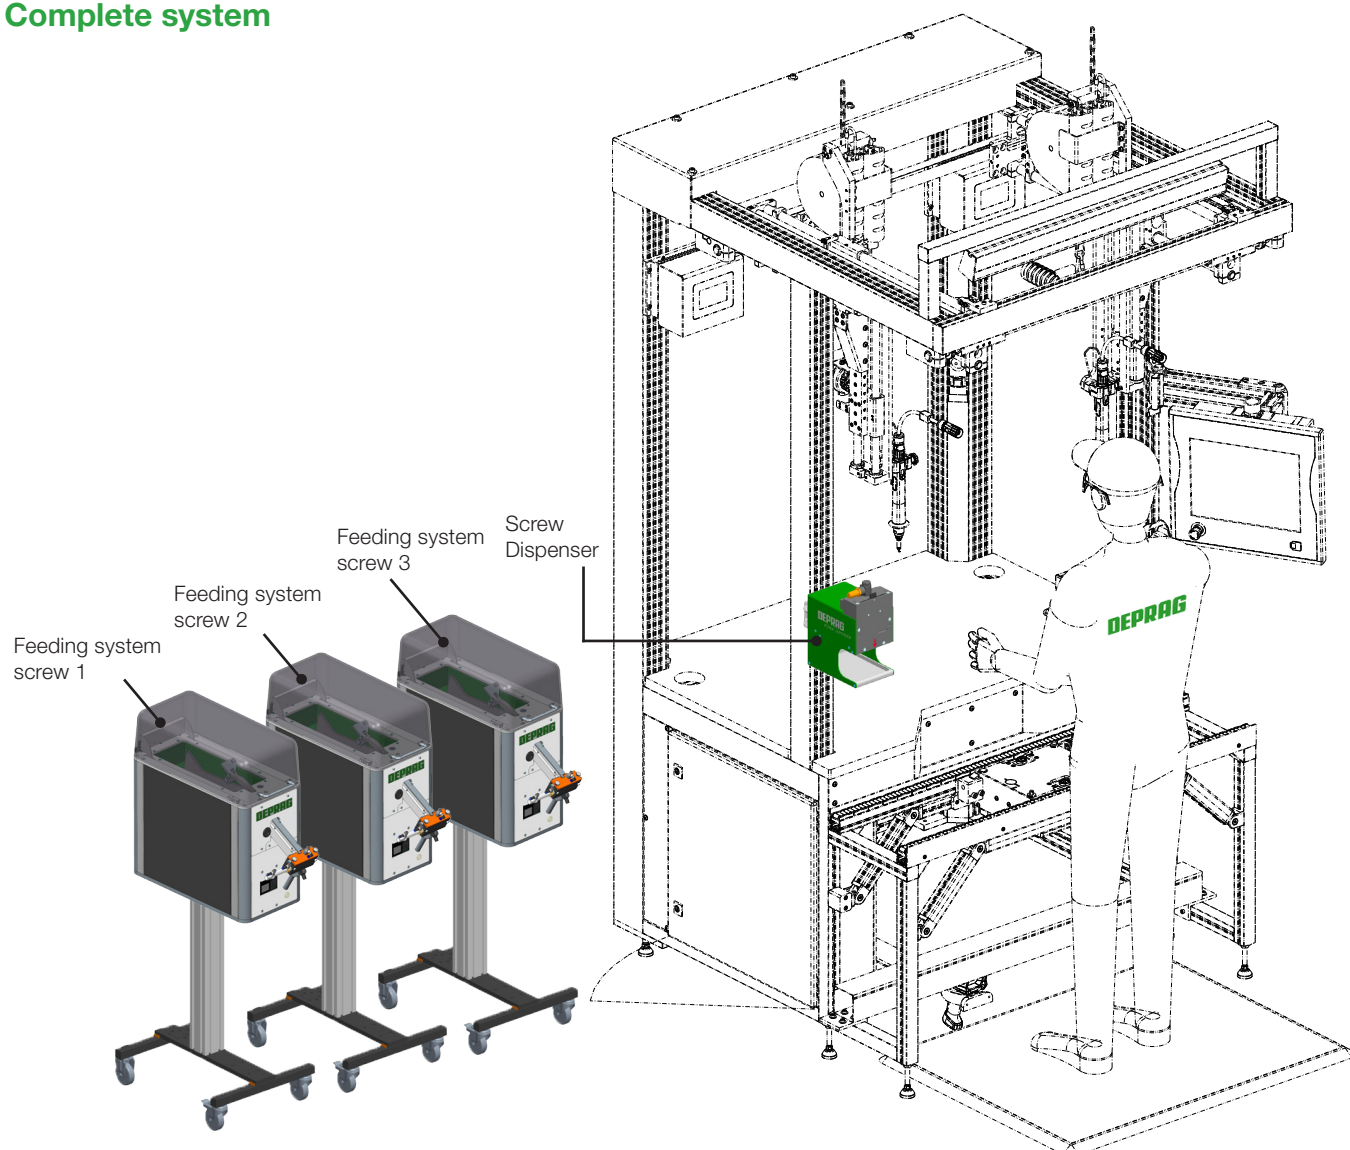

DEPRAG
DEPRAG SCHULZ GMBH u. CO.



Distributed in the Netherlands by:



Zumpolle B.V. • Valeton 14 • 5301 LW Zaltbommel • Tel: 0031418671816